
# TANK FOR **FIRE-FIGHTING** FIRE HYDRANT




page 1

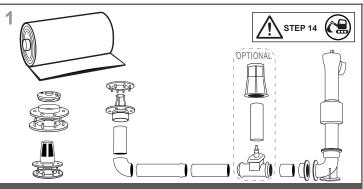

### WARNING

If the filling is not done immediately: **ballast the tank** with a minimum of 5 cm of liquid



Clean and leveled ground + a layer of sand (0/2) 10 cm (+/-2 cm)


# IMPORTANT


3

Installation of the tank according to its volume

V. (m³)	Number of people
1 to 180	1 to 2
180 to 480	3 to 4
480 to 700	4 to 6


It is **strictly forbidden** to handle the product with machines to avoid any deterioration

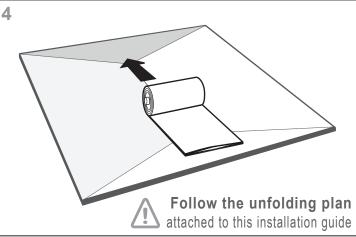

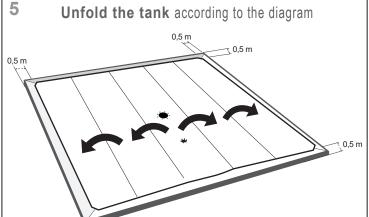


# MANDATORY Mounting pads necessarily before filling for each angle Use a 10mm wrench (not provided)


## 7 Stir the tank by the angles from top to bottom manually

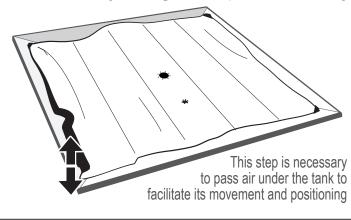




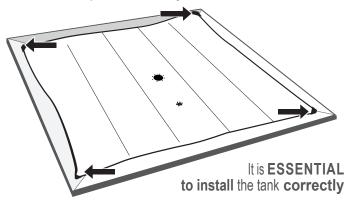

## FOR ALL THE INLETS/OUTLETS



STRETCH WITH CARE without tools, in order to pass inside the counterflange with its seal



Install correctly the counterflange in its socket

